TA TA

TOP OF CONCRETE SIDEWALK TOP OF ASPHALT

HANDICAP


RAMP.

PLAN VIEW

0.5

6' RAMP @ 1:12 SLOPE

4" THICK CONC. SIDEWALK

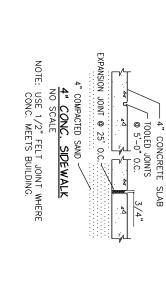

<u>ASPHALT</u> TYPICA! **SECTION**

NOTE: ASPHALT & BASE COURSE SHALL BE SUPPLIED & INSTALLED AS PER WI DOT STANDARD SPEC. FOR ROAD & STRUCTURE CONSTRUCTION, LATEST ED. - COMPACTED SUBGRADE -1-1/2" ASPHALTIC CONC. SURFACE COURSE, TYPE E-0.3 -8" BASE AGGREGATE DENSE, 1-1/4", IN PLACE BINDER COURSE, TYPE E-0.3

V

GRASS

6' RAMP

TC891.30

GRASS

CONC. SIE

SIDEWALK

D

V

SIDEWALK AREA

 ∇

0

V ∇

 ∇

V ∇

SIDEWALK AREA

V

V

DN.

 ∇ Ż

ASPHAL

TA890.70 TC890.70

TC891.20

ASPHALT

NOTE: REMOVE & REPLACE AGGREGATE WHEN VOIDS BECOME FILLED W/ SEDIMENT OR IF SURFACE OPENINGS BECOME PLUGGED SO THAT TRACKING AREA DOES NOT FUNCTION. AGGREGATE TRACKING AREA 12" STAPLE FILTER FABRIC TO POSTS-2" x 2" x 4' POSTS, 3' O.C. FOR — GEOTEXTILE FABRIC ONLY, 8' O.C. FOR GEOTEXTILE FABRIC WITH ALTERNATE SUPPORT COMPONENTS SUBGRADE 3-6" DIA. CLEAN AGGREGATE

BURY FILTER FABRIC 6" BELOW FINISHED GRADE, COMPACT GRADE GEOTEXTILE FABRIC FENCE DETAIL

SILT FENCE SHALL BE SUPPLIED & INSTALLED AS PER THE WI DOT STANDARD SPECIFICATIONS FOR HIGHWAY & STRUCTURE CONSTRUCTION.

_ANDSCAPE_NOTES:

- THE CONTRACTOR SHALL VERIFY ALL EXIST. CONDITIONS.

 THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING LOCA—
- TIONS OF EXIST UTILITIES.

 USE TYPAR 3301 FABRIC WEED BARRIER LANDSCAPE FABRIC (OR APPROVED EQUAL) UNDER ALL PLANTING BED MULCH UNLESS OTHERWISE NOTED.
- USE 1-1/2" WASHED AGGREGATE STONE MULCH IN PLANTING BEDS, 3" DEPTH. STONE MULCH SHALL BE CLEAN, & FREE FROM DELETERIOUS MATERIALS, STICKS, STONES, NOXIOUS WEEDS, SALT & FINE SILTS, CLAYS OR TOPSOIL.

 USE SHREDDED BARK MULCH AT ALL SINGULARLY PLANTED TREES, MIN. 3" DEPTH, 4' DIA.
- TREES, MIN. 3" DEPTH, 4' DIA. TOP OF MULCH IN PLANTING BEDS SHALL BE EVEN W/ TOP OF
- SURROUNDING SURFACES.

- IF DISCREPANCIES OCCUR, PLANT QUANTITIES SHOWN ON PLAN TAKE PRECEDENCE OVER PLANTING SCHEDULE.

 ALL PLANT MATERIAL SHALL HAVE A ONE YEAR WARRANTY
- AGAINST DEATH & UNHEALTHY CONDITION, EXCEPT AS A RESULT OF NEGLECT BY OWNER, DAMAGE BY OTHERS & UNUSUAL PHENOMENA BEYOND CONTRACTOR'S CONTROL. PLANT WARRANTY SHALL BEGIN ON THE DATE OF FINAL ACCEPTANCE OF THE PROJECT.

 * ALL PLANTS SHALL CONFORM TO THE VARIETIES SPECIFIED IN THE PLANT LIST & SHALL BE TRUE TO BOTANICAL NAME AS IN HORTUS THIRDS.


 * ALL PLANTS INCLUDING THEIR ROOTS SHALL BE FROM DISEASE INSECTS & OTHER INJURIOUS QUALITIES & SHALL BE WELL FORMED, FULL, IN A HEALTHY VIGOROUS GROWING CONDITION, REAR OR AT SPECIMEN QUALITY.
- ALL PLANTS S MOVED FROM THE SITE & REPLACED WE ANY ADDITIONAL TOPSOIL NEEDED FOR I SHRUBS AS PER THE PLANTING DETAIL INCIDENTAL TO THE PLANT MATERIAL PROPERTY. ACCEPTABLE THE SITE & REPLACED WITH ACCEPTABLE MATERIAL IOPSOIL NEEDED FOR INSTALLING THE TREES & THE PLANTING DETAIL SHALL BE CONSIDERED SHALL BE SUBJECT TO INSPECTION BY THE OWNERS IVE UPON DELIVERY. ANY PLANTS DEEMED NOT BY THE OWNERS REPRESENTATIVE SHALL BE RE-THE PLANT MATERIAL PRICE
- TOPSOIL SHALL CONSIST OF A HUMUS-BEARING LUCING TO SUSTAIN VIGOROUS GRASS GROWTH FREE FROM DELETERIOUS MATERIALS W/ A Ph RANGE OF 6.0 TO 7.0. TOPSOIL NOT MEET-MATERIALS W/ A Ph RANGE OF 6.0 TO 7.0. TOPSOIL NOT MEETING THESE REQUIREMENTS SHALL BE AMENDED AT NO ADDITIONAL SHREDDED BARK MULCH SHALL BE FRESHLY SHREDDED HARD-

COST.

COMPOSTED OR TREATED WITH NITROGEN TO COMPENSATE FOR SUCH LOSS IN DECOMPOSITION.

ANY PLANTS DELIVERED TO THE PROJECT SITE THAT ARE NOT INSTALLED THE SAME DAY SHALL BE "HEALED IN" W/ TOPSOIL. WOOD BARK FREE FROM DELETERIOUS MATERIALS, STICKS, STONES, NOXIOUS WEEDS, SALT & OTHER MATERIALS HARMFUL TO PLANT GROWTH. SHREDDED BARK MULCH SHALL BE EITHER COMPOSTED OR TREATED WITH NITROGEN TO COMPENSATE FOR BE "HEALED IN" W/ TOPSOIL,

WOOD CHIPS, SHREDDED BARK, OR SAWDUST & ADEQUATELY WATERED UNTIL SUCH TIME THE PLANTS CAN BE INSTALLED. CONTRACTOR SHALL BE RESPONSIBLE FOR WATERING ALL PLANT MATERIAL INCLUDING GRASS OR SOD FOR TWO WEEKS AFTER FINAL ACCEPTANCE OF PROJECT. WATER SHALL BE PROVIDED IN AN ADEQUATE AMOUNT TO SUSTAIN VIGOROUS PLANT GROWTH.

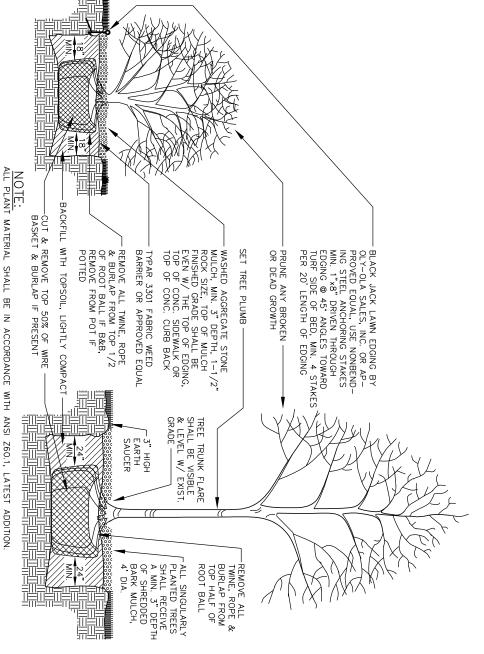

TREE & SHRUB PLANTING DETAIL
NO SCALE ALL PLANT MATERIAL SHALL BE IN ACCORDANCE WITH

NOTES:
2'x4' DETECTABLE WARNING FIELD SHALL BE A METAL PANEL #844-2061, CHROME YELLOW MED.
DCC-1003 DEGUSSA, MFR. MetaDome, LLC, 2136 E. DAYTON ST., MADISON, WI 53704, 608-2498644, (www.metadomelic.com) OR APPROVED EQUAL INSTALL AS PER MANUFACTURES SPECS.
THE SURFACE TEXTURE OF THE RAMP (EXCLUDING THE TRUNCATED DOME PANEL) SHALL BE A
COARSE BROOMED FINISH, TRANSVERSE TO THE SLOPE OF THE RAMP.

SECTION

<u>D</u>-D

HANDICAP NO SCALE

RAMP

<u>DETAIL</u>

4" COMPACTED SAND

SITE DETAILS

 \bigcirc

;; @

MENOMONIE AIRPORT TERMINAL MENOMONIE AIRPORT DOMAIN DRIVE & INDIANHEAD DRIVE MENOMONIE, WISCONSIN



DRAWNG FILE 00base_45750001.dwg	REFERENCE FILE	REVISIONS	DATE DEC. 2008	снескер ву	DRAWN BY D B	BOOK NO.	JOB NO. 4575-001